

PHILIPS

CertaFlux

LED

CertaFlux LED Strip
1ft 775lm 8xx HV3



Datasheet

CertaFlux LED Strip

CertaFlux LED Strip systems are designed to enable linear LED luminaires for high volume markets. CertaFlux LED Strip offers good product performance and functionality, with good quality of light, meeting market needs for basic lighting.

Key features and benefits

- LED module efficiency up to 149 lm/W
- Long life-time: >50,000 hours
- High color rendering (CRI >80)
- Color consistency of 4 SDCM
- Choice of color temperatures (3000 K, 4000 K and 6500 K)
- One-foot (280 mm) and two-foot (560 mm) lengths
- Two lumen packages: 775 lm and 1100 lm per foot
- Small LED module width of only 20mm
- Wide temperature (Tc) range from -40 °C to +85 °C
- Push-in connectors enabling automated wiring
- Three year system warranty

June 2017

Zhaga

Ordering data

Commercial product name	EOC	12NC	Box quantity
CertaFlux LED Strip 1ft 775lm 830 HV3	8718696 728055 00	9290 014 36906	168
CertaFlux LED Strip 1ft 775lm 840 HV3	8718696 728079 00	9290 014 37006	168
CertaFlux LED Strip 1ft 775lm 865 HV3	8718696 728093 00	9290 014 37106	168

Drive currents

Parameter	Nominal*	Life**	Max***	Unit
CertaFlux LED Strip 1ft 775lm 8xx HV3	290	400	480	mA

Module temperatures

Parameter	Nominal*	Life**	Max***	Unit
T _c (case temperature at T _c point)	45	75	85	°C

* Nominal value at which typical performance is specified

** Value at which life time is specified

*** Maximum value for safe operation, do not operate above this value

Optical characteristics - table per color (CCT)


CertaFlux LED Strip 1ft 775lm 830 HV3

Parameter	Min	Typ	Max	Unit
Luminous flux	665	719	773	lm
Module efficacy	121	135	148	lm/W
Correlated color temperature (CCT)		3000		K
Color coordinates (CIEx, CIEy)		(0.430, 0.402)		-
Color consistency			4	SDCM
CRI	80			
Radiation angle		120		deg
Photobiological safety			RG1	
Energy efficiency label		A++		
$\Delta u'v'$ at 6000 hours			0.007	

R9=1

Measurement precision $\pm 5\%$ for the flux data and $\pm 6\%$ for the efficacy data. Measurement precision for color coordinates ± 0.005 . Measurement precision for CRI ± 1.5

Operation point	830	lm	lm/W
80% I-nom 232 mA	Tc 25 °C	612	145
	Tc-nom 55 °C	591	142
	Tc-life 75 °C	556	135
I-nom 290 mA	Tc 25 °C	745	138
	Tc-nom 55 °C	719	135
	Tc-life 75 °C	675	128
I-life 400 mA	Tc 25 °C	980	126
	Tc-nom 55 °C	944	123
	Tc-life 75 °C	881	116

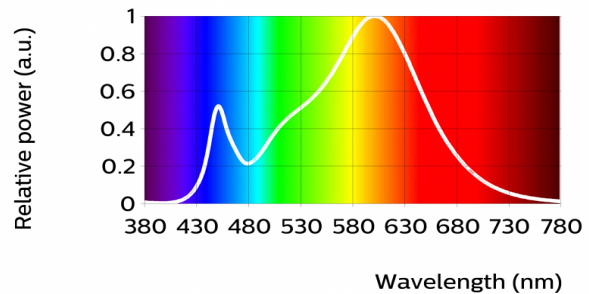


CertaFlux LED Strip 1ft 775lm 840 HV3

Parameter	Min	Typ	Max	Unit
Luminous flux	717	775	833	lm
Module efficacy	131	145	160	lm/W
Correlated color temperature (CCT)		4000		K
Color coordinates (CIEx, CIEy)		(0.379, 0.377)		-
Color consistency			4	SDCM
CRI	80			
Radiation angle		120		deg
Photobiological safety			RG1	
Energy efficiency label		A++		
$\Delta u'v'$ at 6000 hours			0.007	

R9=4

Measurement precision $\pm 5\%$ for the flux data and $\pm 6\%$ for the efficacy data. Measurement precision for color coordinates ± 0.005 . Measurement precision for CRI ± 1.5

Operation point	840	lm	lm/W
80% I-nom 232 mA	Tc 25 °C	659	156
	Tc-nom 55 °C	637	153
	Tc-life 75 °C	599	146
I-nom 290 mA	Tc 25 °C	803	149
	Tc-nom 55 °C	775	145
	Tc-life 75 °C	727	138
I-life 400 mA	Tc 25 °C	1056	136
	Tc-nom 55 °C	1017	132
	Tc-life 75 °C	951	125

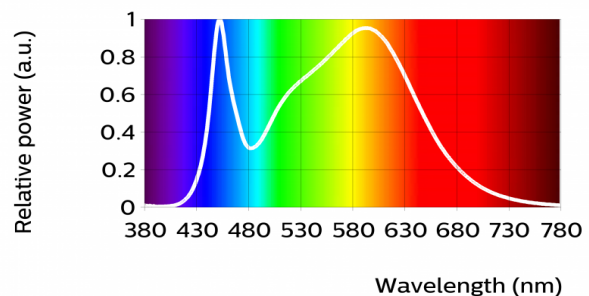


CertaFlux LED Strip 1ft 775lm 865 HV3

Parameter	Min	Typ	Max	Unit
Luminous flux	717	775	833	lm
Module efficacy	131	145	160	lm/W
Correlated color temperature (CCT)		6500		K
Color coordinates (CIEx, CIEy)		(0.311, 0.325)		-
Color consistency			4	SDCM
CRI	80			
Radiation angle		120		deg
Photobiological safety			RG1	
Energy efficiency label		A++		
$\Delta u'v'$ at 6000 hours			0.007	

R9=7


Measurement precision $\pm 5\%$ for the flux data and $\pm 6\%$ for the efficacy data. Measurement precision for color coordinates ± 0.005 . Measurement precision for CRI ± 1.5

Operation point	865	lm	lm/W
80% I-nom 232 mA	Tc 25 °C	659	156
	Tc-nom 55 °C	637	153
	Tc-life 75 °C	599	146
I-nom 290 mA	Tc 25 °C	803	149
	Tc-nom 55 °C	775	145
	Tc-life 75 °C	727	138
I-life 400 mA	Tc 25 °C	1056	136
	Tc-nom 55 °C	1017	132
	Tc-life 75 °C	951	125

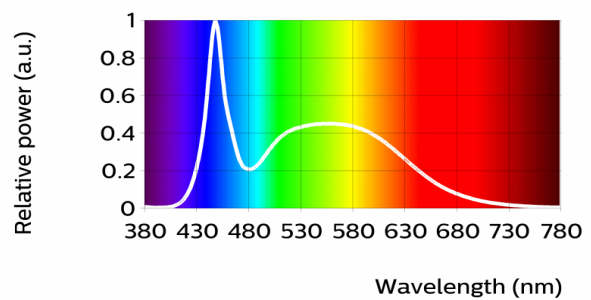

Beam shape

The Philips LED module generates a Lambertian beam shape, which is a pragmatic starting point for OEMs wishing to design secondary optics.

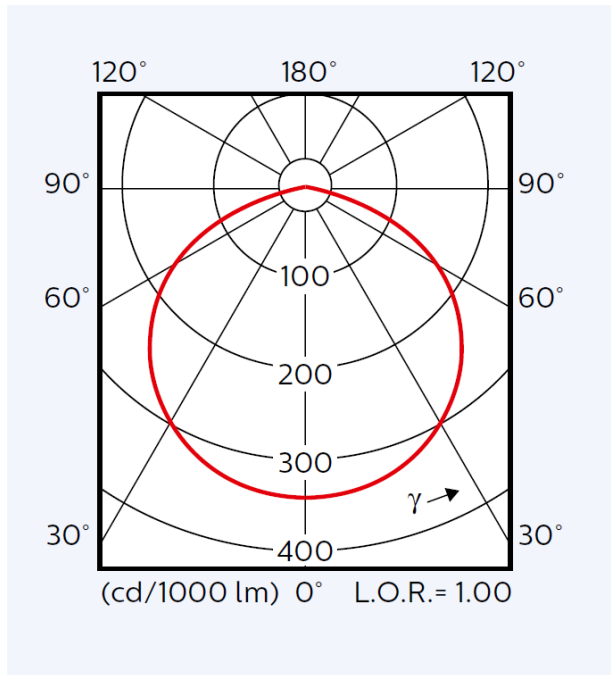

Electrical characteristics

[CertaFlux LED Strip 1ft 775lm 830 HV3](#)
[CertaFlux LED Strip 1ft 775lm 840 HV3](#)
[CertaFlux LED Strip 1ft 775lm 865 HV3](#)


Parameter	Min	Typ	Max	Unit
Forward voltage	18.0	18.4	19.0	V
Power consumption	5.2	5.3	5.5	W
Number of modules in series per chain			16	

Measurement precision for Vf +/- 3%. Measurement precision for power +/- 3.3%

Tuning information


Flux and efficacy versus current (at Tc nominal)

I [mA]	Flux [%]	Efficacy [%]
400	131	91
348	117	95
290	100	100
261	91	103
232	82	105
203	73	108
174	64	111
145	54	115

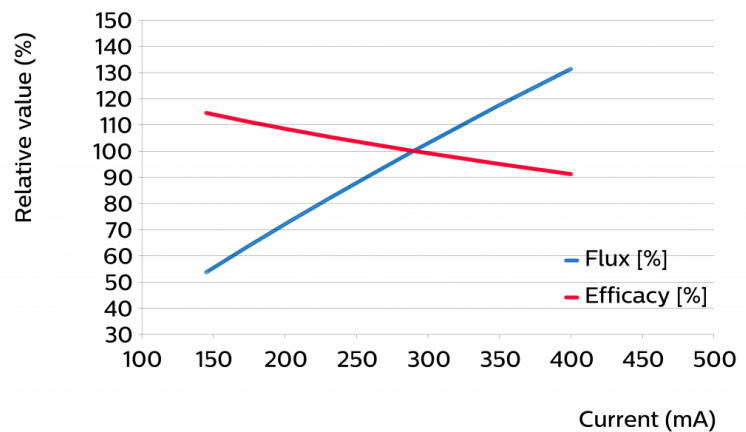

Flux and efficacy versus temperature at Tc (at I nominal)

Tcase [°C]	Flux [%]	Efficacy [%]
75	93	95
45	100	100
25	104	103
0	108	105

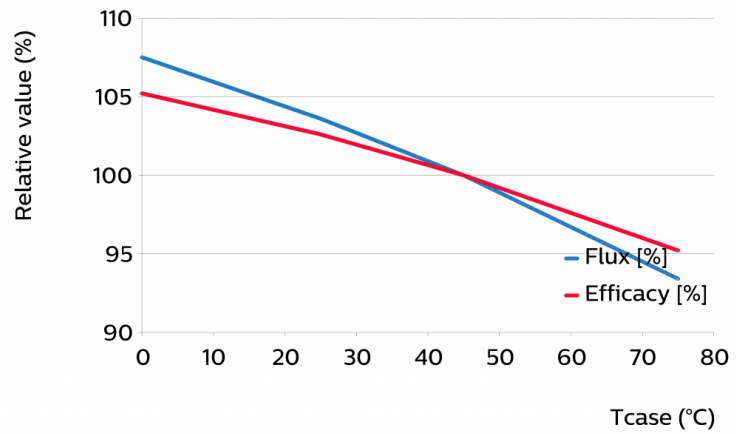

Lumen maintenance

Operation point	Lumen maintenance x 1000 hours	L70			L80			L90		
		B50	B20	B10	B50	B20	B10	B50	B20	B10
80% I-nom 232 mA	Tc 25°C	>50	>50	>50	45	44	43	21	21	20
	Tc-nom 45°C	>50	>50	>50	34	33	32	16	16	15
	Tc-life 75°C	45	44	43	28	28	27	13	13	13
I-nom 290 mA	Tc 25°C	>50	>50	>50	43	42	41	20	20	20
	Tc-nom 45°C	>50	50	49	32	31	31	15	15	15
	Tc-life 75°C	43	42	42	27	26	26	13	12	12
I-life 400 mA	Tc 25°C	48	47	46	30	29	29	14	14	14
	Tc-nom 45°C	36	35	34	22	22	21	10	10	10
	Tc-life 75°C	30	29	29	19	18	18	9	9	8

Thermal switching table

Calculated number of switches at which the survival rate of the population >90%, at a given ambient temperature and delta T with respect to Tc (where Tc = Tambient + delta T)

		Tambient [°C]												
		-40	-30	-20	-10	0	10	20	30	40	50	60	70	
delta T [°C] (delta T = Tc - Tambient)	Continuous operation or dimming only	10	>100	>100	>100	>100	>100	>100	>100	>100	>100	97	77	54
		20	59	59	59	59	58	58	57	52	42	29	X	
		30	36	36	36	35	35	35	33	28	20	X	X	
		40	23	23	24	23	23	22	20	15	X	X	X	
		50	16	16	16	16	16	14	12	X	X	X	X	
		60	11	11	11	11	11	10	X	X	X	X	X	
		70	9	9	8	8	8	X	X	X	X	X	X	
		80	6	6	6	6	X	X	X	X	X	X	X	
		90	5	5	5	X	X	X	X	X	X	X	X	
		100	4	4	X	X	X	X	X	X	X	X	X	

Absolute ratings

Parameter	Min	Typ	Max	Unit
Current through the LED module (I-max)			480	mA
Case temperature (Tc-max)			85	°C
Power at rated Vf-max and I-max			10.2	W
ESD (direct contact)			8	kV
ESD (air)			15	kV
Working voltage			350	V _{dc}
Voltage strength	1700			V _{dc}
Ambient temperature	-40			°C

Application information

Certificates and Standards

IEC 62031:2008 (First Edition) + A1:2012 + A2:2014

Relevant clauses of IEC 62471:2006 (Incl. IEC/TR 62471-2: 2009 and IEC/TR 62778: 2014)

ENEC

CE

EN 62031:2008 (First Edition) + A1:2013 + A2:2015

Relevant clauses of EN 62471:2008 (With IEC/TR 62471-2: 2009 and IEC/TR 62778: 2014)

Environmental

RoHS/REACH

Zhaga

Compliant*

*Book 7, L28W2

Application

IP rating	No IP-rating
Overheating protection	No protection
Luminaire class	IEC Class I
Dimming	Yes



© 2017 Philips Lighting Holding B.V. All rights reserved.

This document contains information relating to the Philips Lighting portfolio, intended for companies who may be interested in developing their product offering. Note that the information provided is subject to change. Philips Lighting does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract.

www.philips.com/technology

06/2017